


SAWCUT ASPH. EDGES STRAIGHT AND TRUE APPROX. 2" DEEP IMMEDIATELY PRIOR TO PATCHING. JAGGED SAWCUTS SHALL NOT BE ACCEPTABLE. STRAIGHT UNIFORM WIDTHS PARALLEL TO THE EDGE OF PAV'T OR CURB ARE REQUIRED. THE FINAL PRODUCT SHALL BE SUBJECT TO THE CITY ENGINEERS APPROVAL.

MAXIMUM "PAYMENT" WIDTH (INFORMATION IS FOR USE ON ANNEXATION PROJECTS ONLY):

10' MAX. SANITARY SEWER MAIN (10' OR LESS)

12' MAX. SANITARY SEWER MAIN (OVER 10' IN DEPTH)

6' MAX. SANITARY SEWER LATERAL 4' MAX. WATER MAIN AND LATERAL (WIDTHS GREATER THAN MAX. WILL NOT BE PAID)

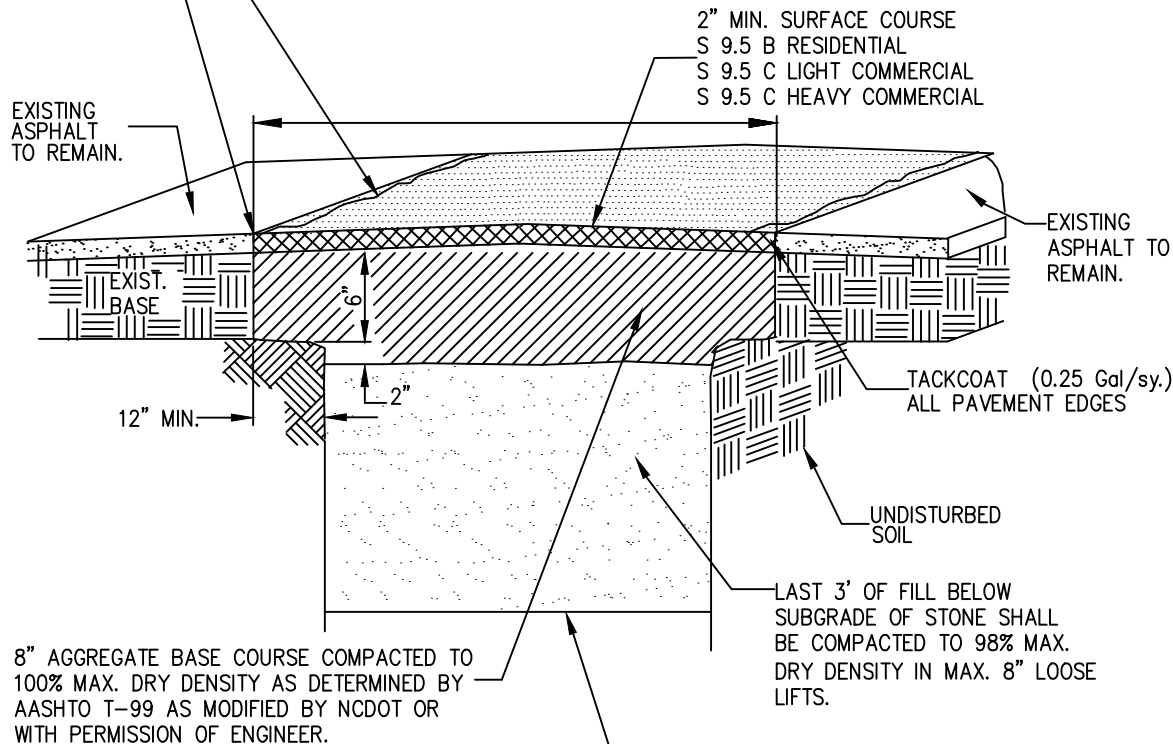


ISOMETRIC

SEE APPLICABLE TRENCH
DETAIL FOR COMPACTION
OF REMAINING TRENCH

NOTE:
SEE DETAIL SD-16.2 FOR TYPICAL CROSS
SECTION OF PAVEMENT STRUCTURE

SEE ADDITIONAL NOTES ON DETAIL SD-11.2

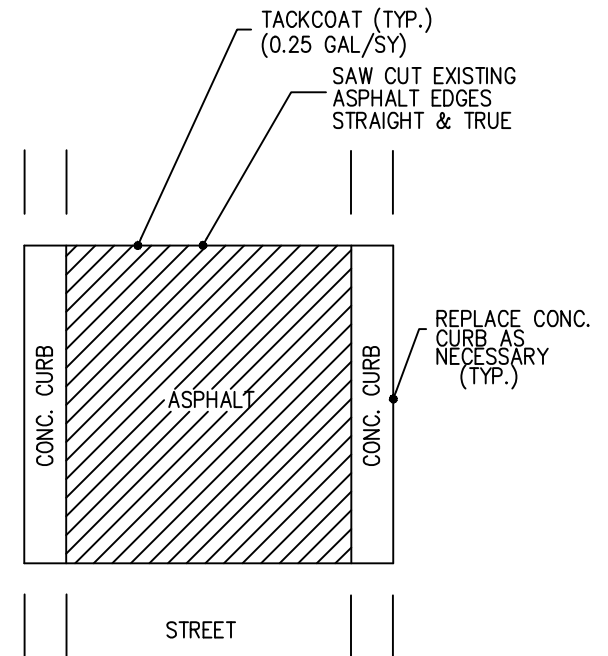

PLAN



ENGINEERING DIVISION
433 HAY ST. 28301
(910) 433-1656

<http://www.fayettevillenc.gov>

TYPICAL PERMANENT SAWCUT AND PAVEMENT PATCH PAGE 2 OF 3

Rev. Date: 26 JAN 21
Not to Scale
Review Date: 26 JAN 21

SD-11.1